


# IWT标准OV型挡圈（轴用）

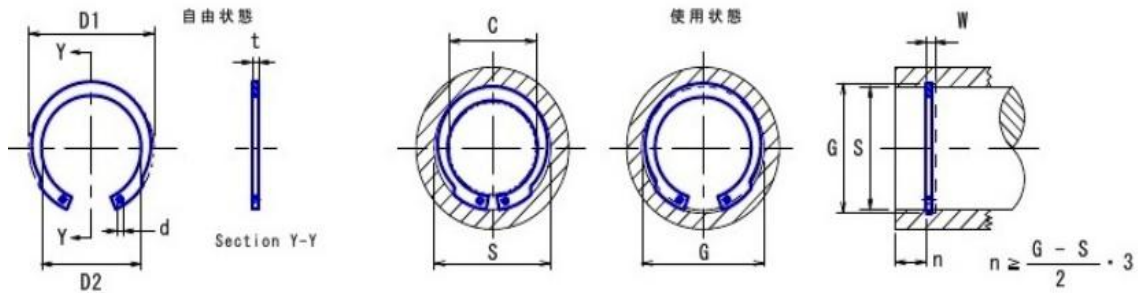

型号	孔径 S	基本尺寸						沟槽尺寸				安装 直径 C	轴向 许用 负荷
		外径		内径	板厚		小孔径	槽径		槽宽			
		D1	公差	D2	t	公差	d	G	公差	W	公差		
OV-15	15	16.10	+0.15 -0.10	12.60	1.00	±0.05	1.0	15.80	+0.10 -0	1.10	+0.08 -0	11.00	800
OV-16	16	17.30		13.10	1.00		1.3	16.80		1.10		11.50	880
OV-17	17	18.30	+0.20 -0.12	14.10	1.00		1.3	17.80	+0.15 -0	1.10		12.50	930
OV-18	18	19.50		15.10	1.00		1.3	19.00		1.10		13.30	990
OV-19	19	20.50		16.10	1.00		1.3	20.00		1.10		14.30	1000
OV-20	20	21.50		16.90	1.00		1.3	21.00		1.10		15.10	1100
OV-21	21	22.50	17.80	1.00	1.3		22.00	1.10	16.00	1150			
OV-22	22	23.50	18.70	1.00	1.3		23.00	1.10	16.90	1200			
OV-24	24	25.90	±0.20	20.30	1.20		1.5	25.20	+0.20 -0	1.30		18.10	1500
OV-25	25	26.90		21.30	1.20		1.5	26.20		1.30		19.10	1600
OV-26	26	27.90		21.90	1.20	1.5	27.20	1.30		19.70	1700		
OV-27	27	29.10		23.10	1.20	1.5	28.40	1.30		20.70	1750		
OV-28	28	30.10	±0.25	23.90	1.20	1.5	29.40	+0.25 -0	1.30	21.30	1800		
OV-30	30	32.10		25.70	1.20	1.5	31.40		1.30	23.10	1900		
OV-32	32	34.40		27.80	1.20	1.5	33.70		1.30	24.90	2100		
OV-33	33	35.50		28.90	1.20	1.5	34.70		1.30	25.90	2150		
OV-35	35	37.80	±0.38	31.00	1.50	±0.07	1.7	37.00	+0.10 -0	1.60	+0.10 -0	27.70	2800
OV-36	36	38.80		31.60	1.50		1.7	38.00		1.60		28.30	2900
OV-38	38	40.80		33.20	1.50		1.7	40.00		1.60		29.90	3100
OV-40	40	43.50		35.50	1.75		2.0	42.50		1.85		31.20	3800
OV-42	42	45.50	37.10	1.75	2.0		44.50	1.85	32.80	4000			
OV-45	45	48.50	39.70	1.75	2.0		47.50	1.85	35.40	4300			
OV-47	47	50.50	41.30	1.75	2.0		49.50	1.85	37.00	4500			
OV-48	48	51.50	41.90	1.75	2.0		50.50	1.85	37.60	4600			
OV-50	50	54.20	±0.45	44.20	2.00		2.5	53.00	+0.30 -0	2.15	38.80	+0.12 -0	5500
OV-52	52	56.20		46.20	2.00		2.5	55.00		2.15	40.80		5700
OV-55	55	59.20		48.80	2.00	2.5	58.00	2.15		43.40	6000		
OV-58	58	62.20		51.60	2.00	2.5	61.00	2.15		46.20	6300		
OV-60	60	64.20	53.40	2.00	2.5	63.00	2.15	48.00	6500				
OV-62	62	66.20	55.40	2.00	2.5	65.00	2.15	50.00	6800				
OV-65	65	69.20	58.20	2.50	2.5	68.00	2.65	52.50	8900				
OV-67	67	71.50	60.10	2.50	2.5	70.00	2.65	54.10	9200				
OV-68	68	72.50	60.90	2.50	2.5	71.00	2.65	54.90	9300				
OV-72	72	76.50	64.50	2.50	2.5	75.00	2.65	58.50	9900				
OV-80	80	85.50	±0.54	73.10	2.50	2.5	83.50	+0.35 -0	2.65	65.60	11000		
OV-85	85	90.50		77.50	3.00	3.0	88.50		3.15	70.00	14000		
OV-90	90	95.50		81.90	3.00	3.0	93.50		3.15	74.40	14500		
OV-95	95	100.50		86.10	3.00	3.0	98.50		3.15	78.60	15500		
OV-100	100	105.50	90.50	3.00	3.0	103.50	3.15	83.00	16500				